




# UL 3271 / CSA AWM I A/B Radox connecting leads

## GENERAL PROPERTIES :

Excellent high temperature, low temperature, ozone and weathering resistance, flame retardant, easy to strip and process, heat pressure and highly abrasion resistant, soldering iron resistant, flexible.

## APPLICATION :

For protected and fixed installation inside electrical equipment, especially suitable for the connection of motor windings, switchboards, magnets and transformers.

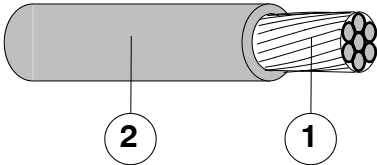

1. Conductor : Stranded tin plated copper, flexible
2. Insulation : RADOX  
extruded irradiation crosslinked polyolefin  
Colours : diverse

Printing :  
≤ 10 mm<sup>2</sup> -

AWM Style 3271 125 °C 600V Huber + Suhner Switzerland Radox CSA AWM I A/B 125 °C 600V FT2 [ Querschnitt ]

≥ 16 mm<sup>2</sup> -

AWM Style 3271 125 °C 600V VW-1 Huber + Suhner Switzerland Radox CSA AWM I A/B 125 °C 600V FT1, FT2 [ Querschnitt ]

## TECHNICAL DATA :

Voltage rating	(UL/CSA)	600	V
Testvoltage 1 min.	(UL/CSA)	2500	V
Voltage rating	(≥0.5mm <sup>2</sup> )	600/1000	V
Testvoltage 1 min.	(≥0.5mm <sup>2</sup> )	3500	V
Temperature rating	(UL/CSA)	+ 125	°C
Max. temperature at short circuit ( max. 5s )		+ 280	°C
Min. temperature	flexing	- 25	°C
	fixed	- 40	°C

Min. bending radius for fixed installation ..... see Tab. 1

## The cables comply with the following standards:

Appliance wiring material ..... CSA C22.2 no. 210 ..... AWM I A/B 125°C 600 V  
Appliance wiring material ..... UL 758 Style 3271

## The cables pass the following fire tests:

Vertical flame spread FT1 ..... (≥16mm<sup>2</sup>) ..... L ≤ 250 mm, t ≤ 60 s ... CSA C22.2 no. 0.3 # 4.11.1  
Horizontal flame spread FT2 ..... L ≤ 100 mm ..... CSA C22.2 no. 0.3 # 4.11.2  
Vertical flame spread ..... 50 < L ≤ 540 mm ..... EN 60332-1-2, IEC 60332-1-2  
Horizontal flame spread, Appliance-Wire ..... V ≤ 25 mm/Min. .... UL 1581 # 1090  
Vertical flame spread, VW-1 ..... (≥16mm<sup>2</sup>) ..... L ≤ 250 mm, t ≤ 60 s ... UL 1581 # 1080

Copyright 2011 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission.  
Uncontrolled copy when printed (will not be updated).

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

**HUBER+SUHNER**  
Wire+Cable Division

CH-8330 Pfäffikon

+41 (0)44 952 22 11

+41 (0)44 952 26 40

www.hubersuhner.com



# UL 3271 / CSA AWM I A/B Radox connecting leads

## Approvals:

CSA  
UL

Certificate 1418425  
File E63322

TABLE 1 : Dimensions, weight

Cross-section: UL 1581 CSA C22.2 No. 210		Cross-section: EN 60228/ IEC 60228	Conductor construction Aufbau nom.	Conductor max. mm	Core diameter D mm	Weight nom. kg / 100m	Min. bending radius mm	Conductor resistance R <sub>20</sub> max. Ω / km
AWG	mm <sup>2</sup>	mm <sup>2</sup>	n x mmØ					
24	0.205		19 x 0.13	0.61	2.22 ± 0.10	0.72	3 x D	86.0
22	0.324		19 x 0.16	0.77	2.40 ± 0.10	0.92	3 x D	53.1
		0.5	19 x 0.18	0.90	2.55 ± 0.10	1.0	3 x D	40.1
20	0.519		19 x 0.20	0.99	2.60 ± 0.10	1.2	3 x D	32.4
		0.75	24 x 0.20	1.13	2.80 ± 0.10	1.3	3 x D	26.7
18	0.823		19 x 0.25	1.23	2.85 ± 0.10	1.6	3 x D	20.4
		1	32 x 0.20	1.28	2.95 ± 0.10	1.6	3 x D	20.0
(16)		1.5	19 x 0.31	1.52	3.20 ± 0.10	2.1	3 x D	13.0
14	2.08		19 x 0.37	1.86	3.50 ± 0.10	2.9	3 x D	9.15
		2.5	48 x 0.25	2.06	3.75 ± 0.10	3.2	3 x D	8.21
12	3.31		37 x 0.35	2.35	4.00 ± 0.15	4.2	3 x D	5.75
		4	56 x 0.30	2.64	4.35 ± 0.15	4.9	3 x D	5.09
10	5.26		37 x 0.44	3.02	4.70 ± 0.15	6.4	3 x D	3.62
		6	84 x 0.30	2.98	4.70 ± 0.15	6.9	3 x D	3.39
(8)		10	80 x 0.40	3.94	6.40 ± 0.15	12.1	3 x D	1.95
(6)		16	119 x 0.40	5.4	8.60 ± 0.2	18.8	3 x D	1.24
(4)		25	182 x 0.40	6.7	9.90 ± 0.2	26.8	3 x D	0.795
(2)		35	266 x 0.40	7.9	11.1 ± 0.2	36.4	3 x D	0.565
(1)		50	378 x 0.40	9.4	13.7 ± 0.25	54.3	4 x D	0.393
(2/0)		70	348 x 0.50	11.5	15.8 ± 0.25	72.3	4 x D	0.277
(3/0)		95	444 x 0.50	13.0	17.4 ± 0.3	95.5	4 x D	0.210
(4/0)		120	570 x 0.50	15.4	19.6 ± 0.3	116	4 x D	0.164
		150	722 x 0.50	17.0	22.2 ± 0.3	150	4 x D	0.132